


MARBOGRESS

SELF COLOURED SURFACES 

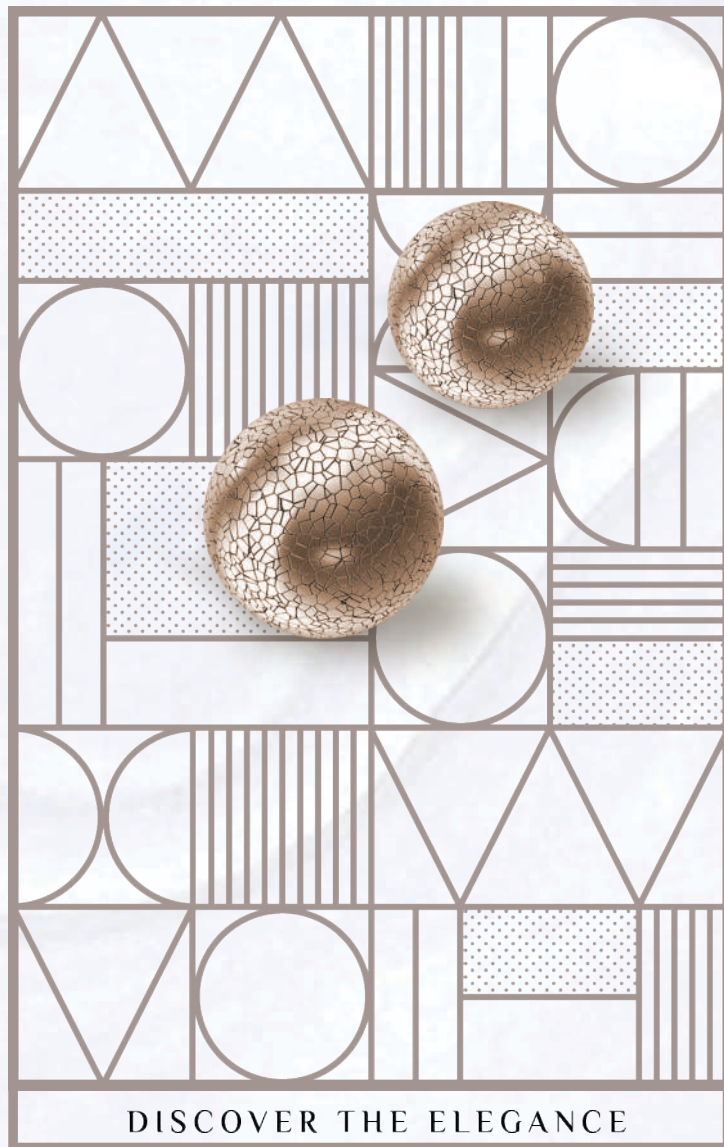

CREST

DECORE COLLECTION



About Our **Decore Tiles** Collection

the perfect fusion of style and functionality from our Décor Collection Tiles. Designed to add a touch of elegance and charm to any room, these tiles are meticulously crafted to turn your space into a work of art.

Our Décor Collection Tiles feature a range of captivating designs inspired by timeless motifs, intricate patterns, and nature's beauty. From delicate florals to geometric shapes, each tile is a masterpiece that adds character and personality to your space.

Explore our diverse selection of decorative tiles to find the perfect match for your interior design vision. Mix and match different patterns, colors, and sizes to create a customized look that reflects your unique style and personality.

Decore Tiles **Features**

-  Resistance to Deep Abrasion
-  Easy to Install
-  Resists Harsh Weather Conditions
-  Resists Water
-  Stain Resistance
-  Hygienic
-  Resistance to Thermal Shocks
-  Lightweight and Easy to Handle
-  Resistance to Acids and Bases
-  Eco-Friendly
-  Easy Cleaning
-  Resists Fire


Decore Tiles **Applications**

-  Reception
-  Kitchen
-  Living Room
-  Sallon & Spa
-  Offices
-  Restaurants & Hotel
-  Bathroom
-  Showroom
-  Gymnasium


1401



1802 R-4



1402

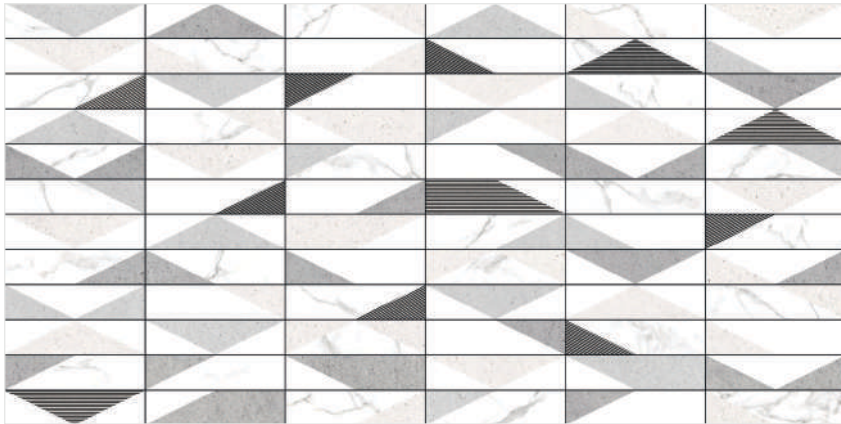

3581


R-4



1403




3525 R-4

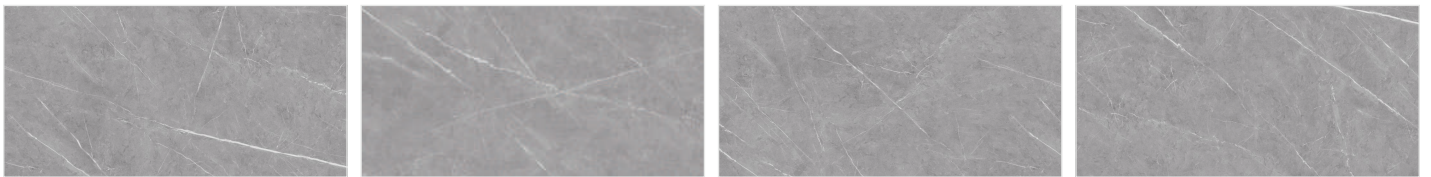

1404




3511 R-4

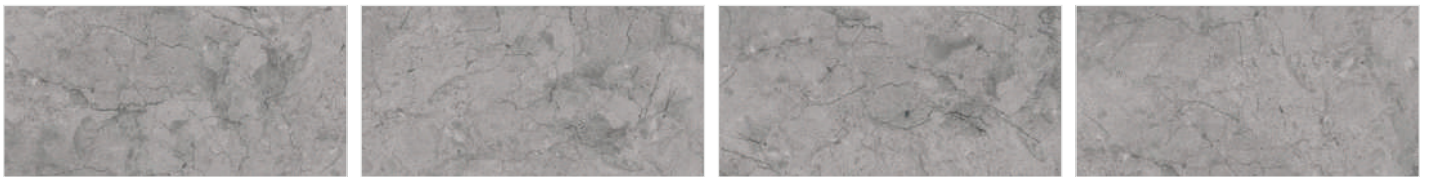


1405




3512 R-4

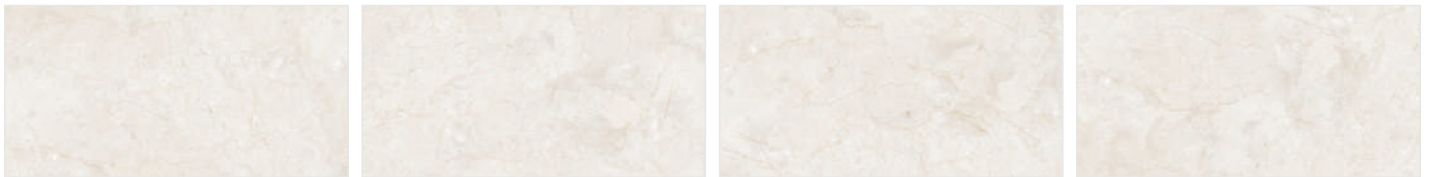

1406

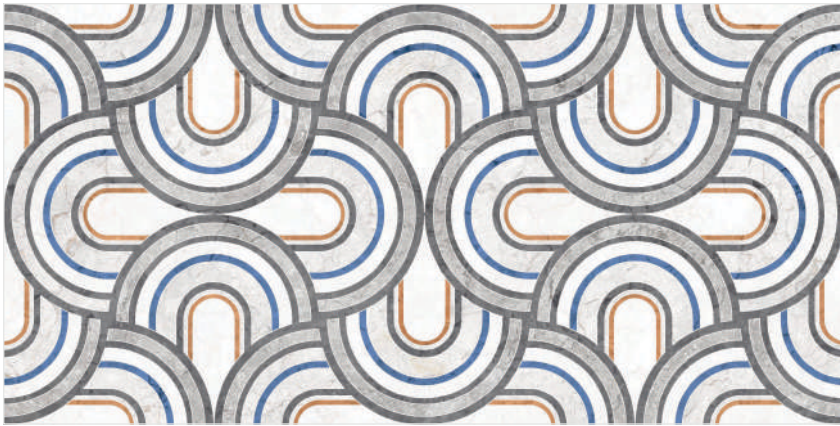


3516 R-4

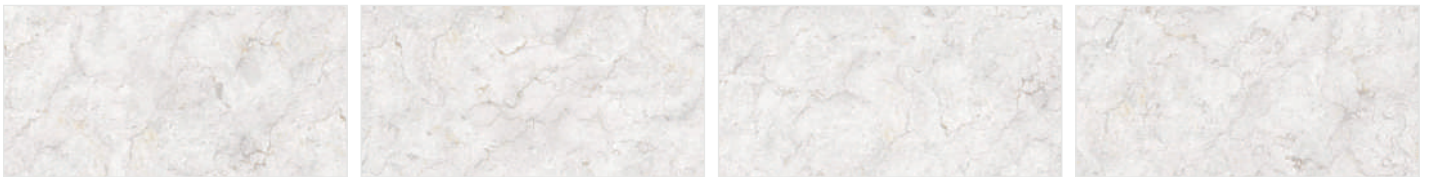

1407



3566 R-4

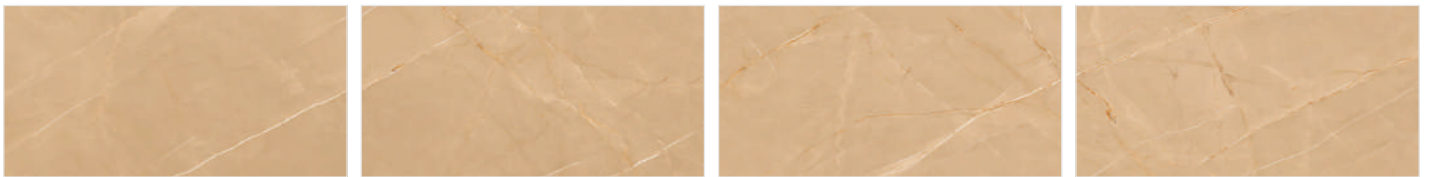

1408




3618 R-4



1409




3619 R-4

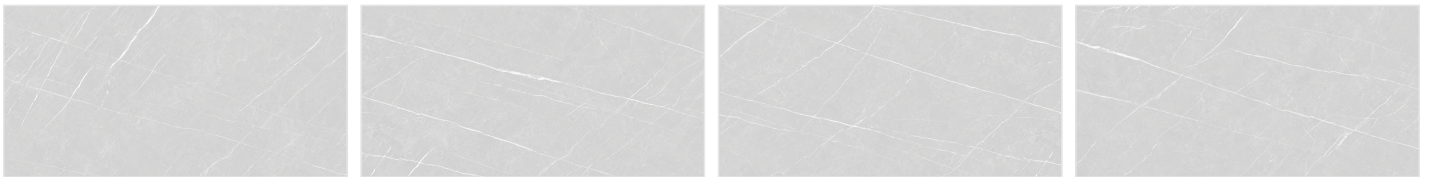


1410




3628 R-4

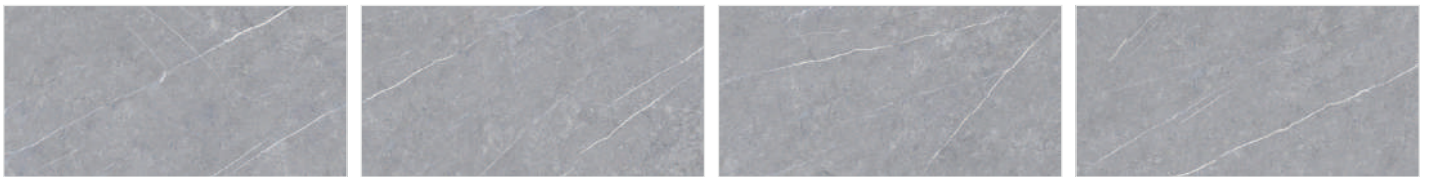

1411

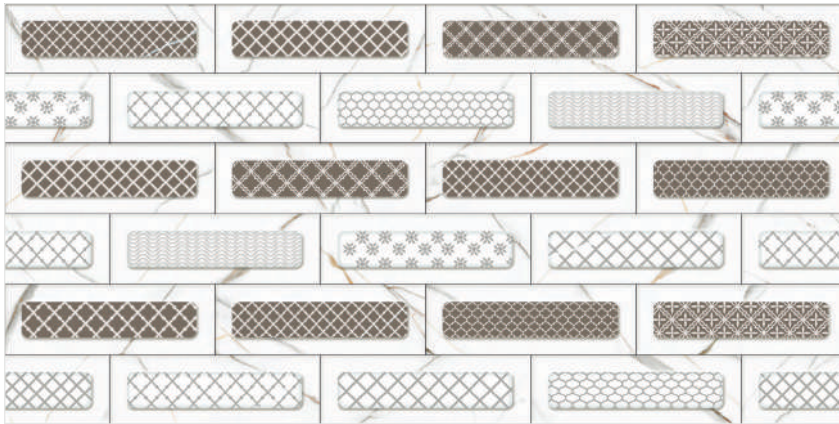


1828 R-4

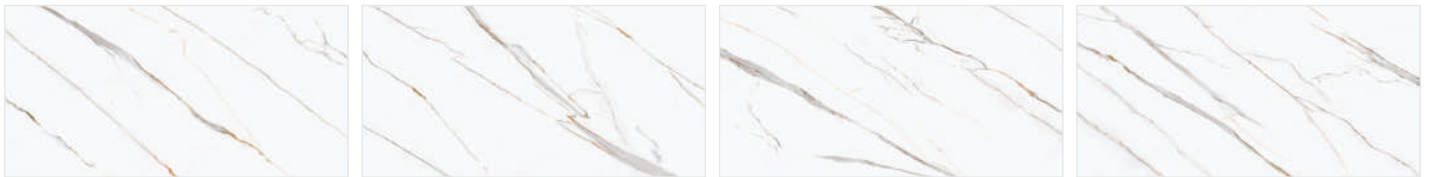

1412




Plain white

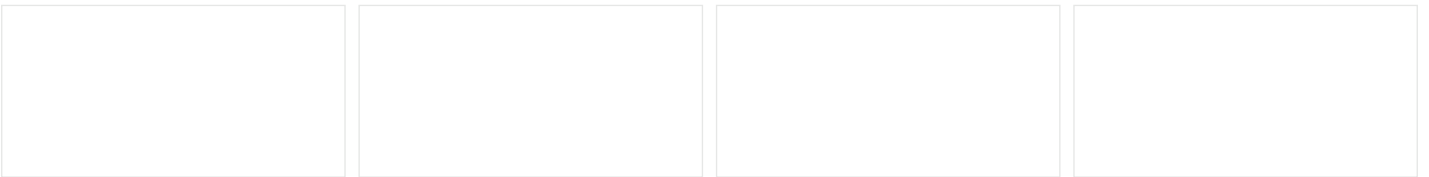

1413



Plain white

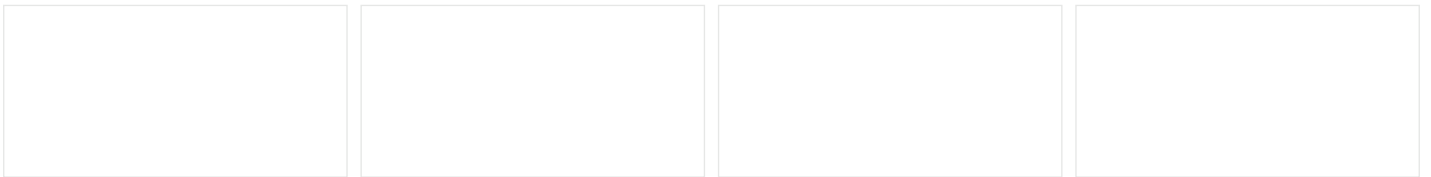

1414



1835 R-4



1415



1870 R-4




1416




1869 R-4



1417

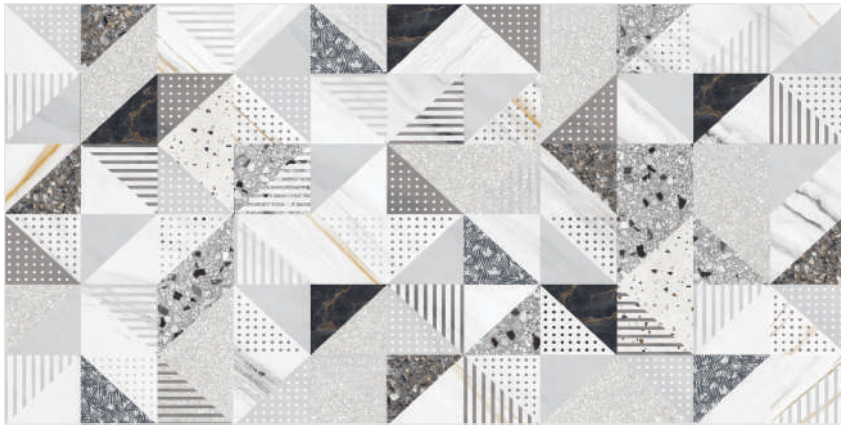

1836 R-4

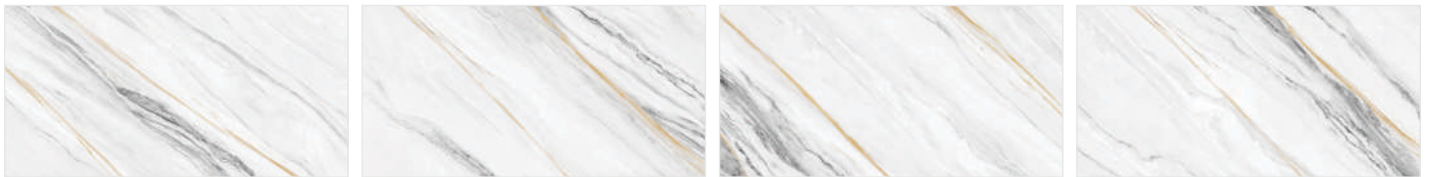

1418




1840 R-4



1419




1850 R-4

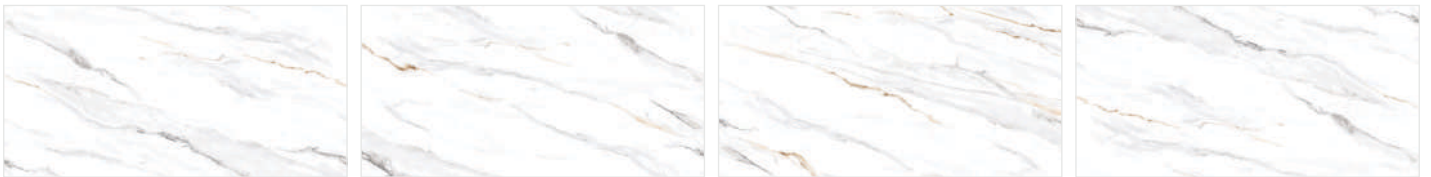

1420




3655 R-4

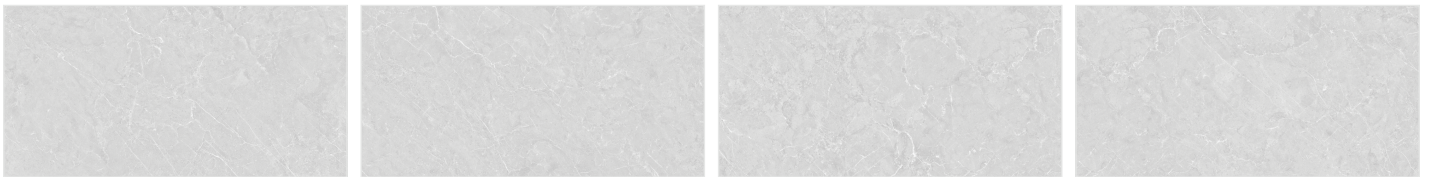

1421




3661 R-4

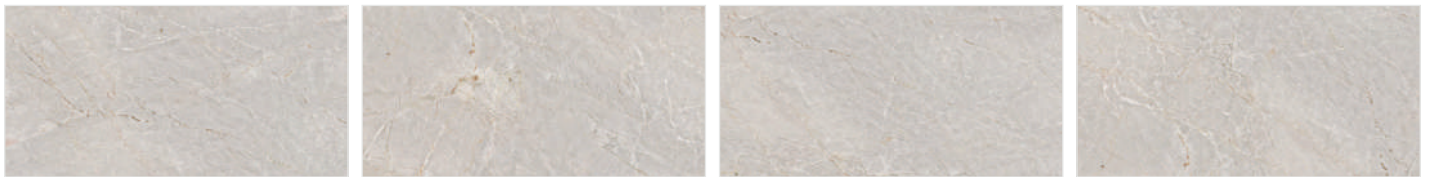

1422




3660 R-4

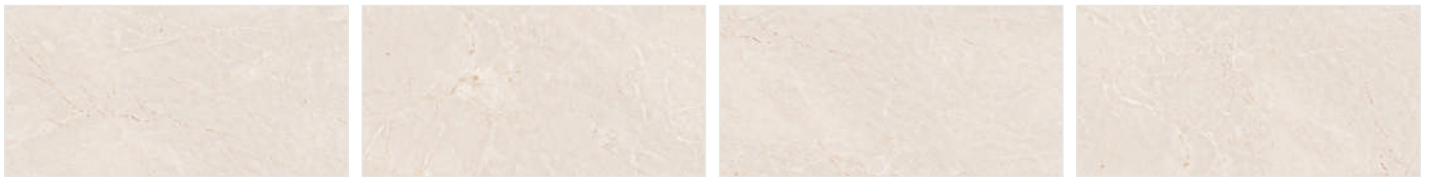


1423




3670 R-4

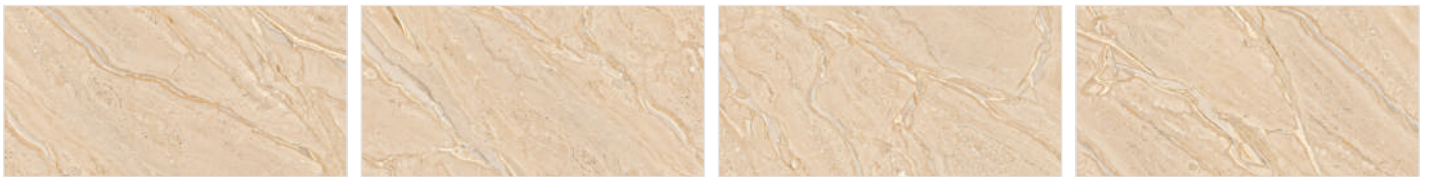

1424

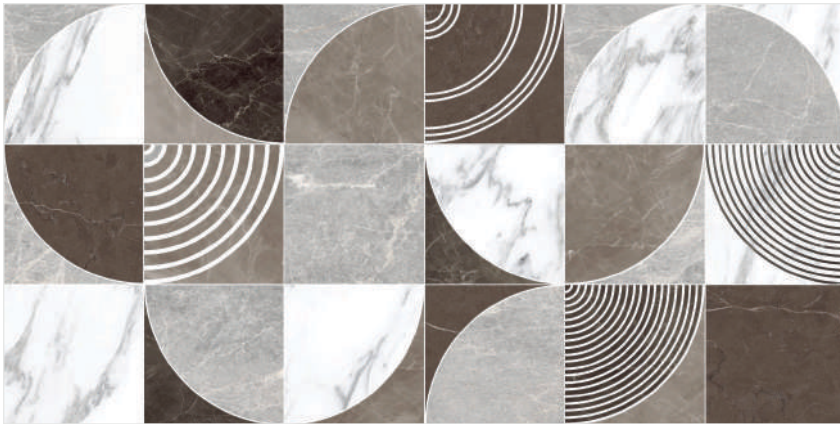


3681 R-4

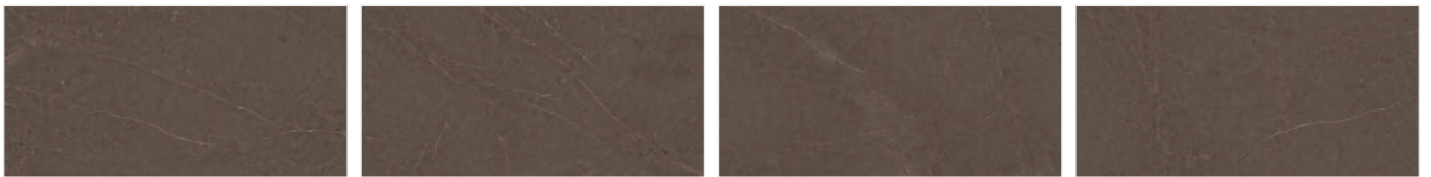

1425



3711 R-4

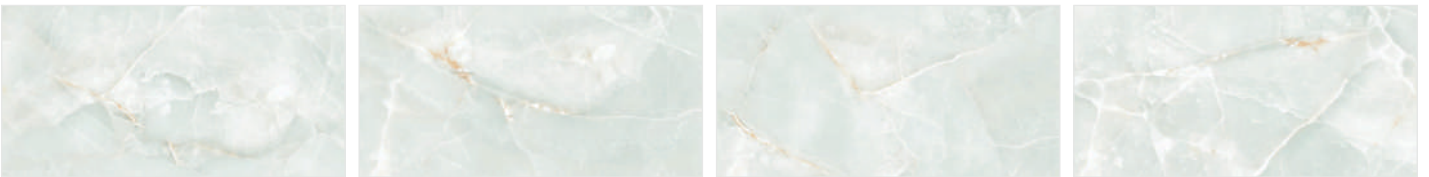

1426




1855 R-4



1427




1827 R-4

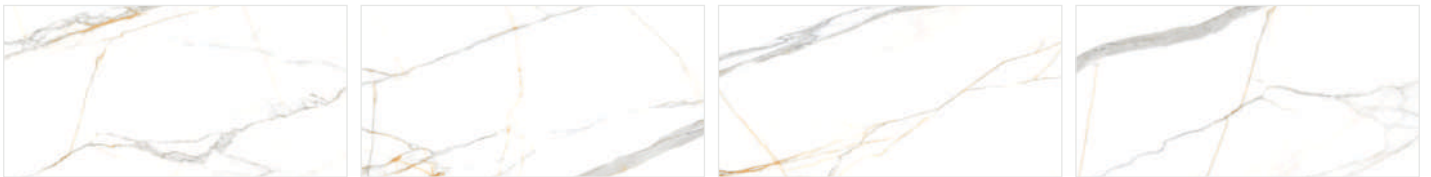

1428




1825 R-4

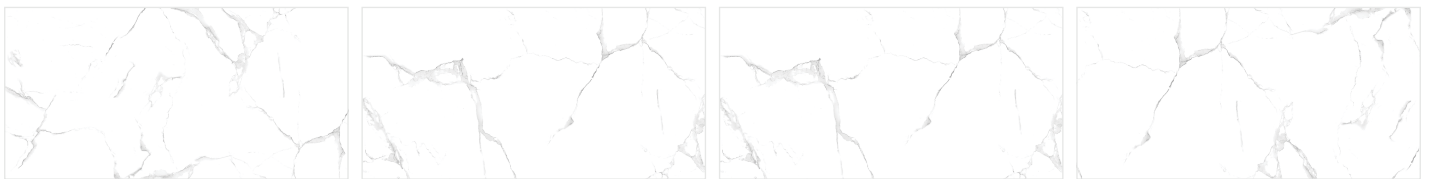

1429



1803 R-4

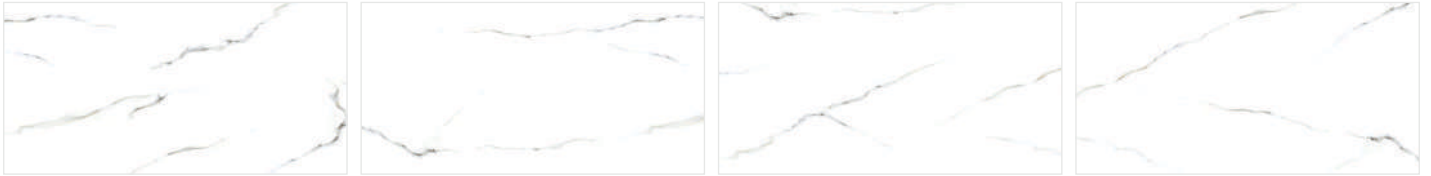

1430




1805 R-4



1431



1804 R-4

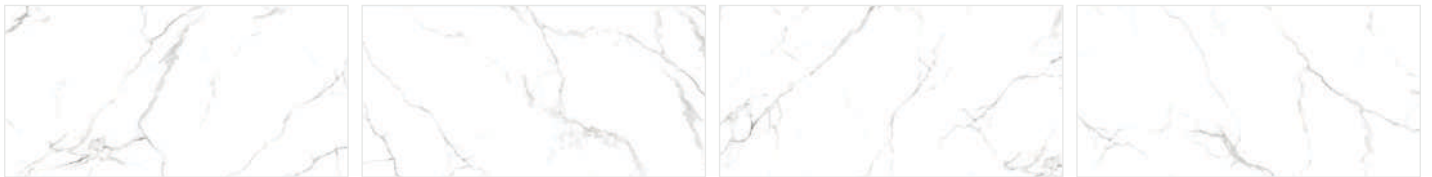

1432



1801 R-4



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO 13006:2018/ EN14411 Gr.Bla	MEAN VALUE	TEST METHOD
Regulatory Properties			
Deviation in length and width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
Straightness in side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10 %	ISO 10545-2
Surface flatness central curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness edge curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
Surface quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(For Plain Color)	ΔE<1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value > 90	Glossmeter 60°
Glossiness (Matt)	as per mfg.	3° < GLOSS < 7°	Glossmeter 60°
Glossiness (satin/Posh)	as per mfg.	7° < GLOSS < 18°	Glossmeter 60°
Structural Properties			
Water absorption	0.50 % ≤ Ev ≤ 3.00 %	0.060 % ≤ Ev ≤ 3.00 %	ISO 10545-3
Bulk density	as per mfg.	> 2.28 gm/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 30.0 N/mm ²	Min. 35.0 N/mm ²	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1100.0 N	Min. 1300.0 N	ISO 10545-4
Breaking strength thickness ≥7.5(For ≥15mm)	Min. 1100.0 N	Min. 1800.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness	as per mfg.	Polished Min 4* / Satin,Posh & Matt Min 6	BS EN 15771
Surface abrasion resistance	as per mfg.	Polish Min. Class 2, Satin & Posh Min. Class 3, & Matt Min. Class 4	ISO 10545-7
Deep abrasion resistance	Max. 175mm ³	Max. 132mm ³	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 ⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR)	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA**	ISO 10545-13
Resistance to high concentrate acid and alkalis unglazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance (COF-WET PENDULAM)##	as per mfg.	Glossy P0(<12),Satin, Posh ≥P1(12-24) Matt ≥P2(25-34)	BS 7976-2
Slip resistance - (Satin / Matt (DCOF) (R value)##	as per mfg.	R9 to R13**	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT
GVT-PGVT	600x 1200mm	9mm	2 pcs.	1.44 sq. mtr.	27 KG (APPROX)

THANK YOU



MARBOGRESS
SELF COLOURED SURFACES

+ (91) 95376 30300 | marbogresstilesllp@gmail.com | www.marbogresstilesllp.com

Ceramic Empire Office no.402 Behind Swastik
complex Halwad Road, Morbi-363642